

“A New Hybrid Active Filter to Damping Harmonic Resonances in Industrial Power Systems”

M.Kalaivani¹, K.Vijayabhaskar², A.Naveen kumar³

¹ M.Tech, Student [Power System] DEPT OF EEE, SVP CET- PUTTUR, AP

² Assoc. Professor, DEPT OF EEE, SVP CET- PUTTUR, AP

³ M.Tech, Student [Power System] DEPT OF EEE, SVP CET- PUTTUR, AP

Abstract: An Industrial power system with unintentional series and/or parallel resonance may result in severe harmonic distortion due to the tuned passive filter and the line inductance. This harmonic distortion can be reduced by suppressing the harmonic resonance using the hybrid active filter, which is operated as variable harmonic conductance according to the voltage total; harmonic distortion. Hence the harmonic distortion falls to an acceptable level in response to change in load or varied parameters of the power system. Since the hybrid filter is composed of a seventh-tuned passive filter and an active filter in series connection, both dc voltage and kVA rating of the active filter are dramatically decreased compared with the pure shunt active filter. In real application, this feature is very attractive since the active power filter with fully power electronics is very expensive. A reasonable tradeoff between filtering performances and cost is to use the hybrid active filter. Design consideration is presented, and experimental results are provided to validate effectiveness of the proposed method. Furthermore, this paper discusses filtering performances on line impedance, line resistance, voltage unbalance, and capacitive filters.

Key words: Harmonic resonance, Hybrid Active Filter (HAF), industrial power system.

NOMENCLATURE

v_s	Source voltage.	
i_s	Source current.	
i_L	Load current.	
i	Filter current.	
L_s	Source inductor.	
R_s	Source resistor.	
L_f	Filter inductor.	
C_f	Filter capacitor.	
R_f	Filter resistor.	
C_{dc}	DC capacitor of the hybrid filter.	
v_{dc}	DC voltage of the hybrid filter.	
v_{dc}^*	DC voltage command.	
e	Terminal voltage.	
e_{qd}^e	Terminal voltage in the synchronous reference frame (SRF).	
$e_{qd,h}^e$	Terminal harmonic voltage in the SRF.	
e_h	Terminal harmonic voltage.	
ω_h	Harmonic frequency in radians.	
i_h^*	Harmonic current command.	
i_f^*	Fundamental current command.	
i^*	Current command.	
G^*	Conductance command.	
k_p	Proportional gain of the tuning control.	
k_i	Integral gain of the tuning control K_c	Proportional gain of the current controller.
THD*	Voltage total harmonic distortion (THD) command.	
I_h	Filter harmonic current amplitude	
$E(s)$	Terminal voltage in the s -domain.	
$I(s)$	Filter harmonic in the s -domain.	
$I^*(s)$	Filter harmonic command in s -domain.	

I. INTRODUCTION

HARMONIC pollution is becoming increasingly serious due to extensive use of nonlinear loads, such as adjustable speed drives, uninterruptible power supply systems, battery charging system, etc. This equipment usually uses diode or thyristor rectifiers to realize power conversion because of lower component cost and less control complexity. However, the rectifiers will contribute a large amount of harmonic current flowing into the power system, and the resulting harmonic distortion may give rise to malfunction of sensitive equipment or interfering with communication systems in the vicinity of the harmonic sources. Normally, tuned passive filters are deployed at the secondary side of the distribution transformer to provide low impedance for dominant harmonic current and correct power factor for inductive loads. However, due to parameter variations of passive filters, unintentional series and/or parallel resonances may occur between the passive filter and line inductance. The functionality of the passive filter may deteriorate, and excessive harmonic amplification may result. Thus, extra calibrating work must be consumed to maintain the filtering capability.

Various active filtering approaches have been presented to address the harmonic issues in the power system. The active filter intended for compensating harmonic current of nonlinear loads is the most popular one, but it may not be effective for suppressing harmonic resonances. Bhattacharya and Divan proposed a hybrid series active filter to isolate harmonics between the power system and the harmonic source. A so-called "active inductance" hybrid filter was presented to improve the performance of the passive filter Fujita *et al.* proposed a hybrid shunt active filter with filter-current detecting method to suppress the fifth harmonic resonance between the power system and a capacitor bank. A hybrid filter in series with a capacitor bank by a coupling transformer was proposed to suppress the harmonic resonance and to compensate harmonic current. However, this method needs extra matching transformers or tuned passive filters to guarantee filtering functionality. Recently, a transformer less hybrid active filter was presented to compensate harmonic current and/or fundamental reactive current Design consideration of the hybrid filter for current compensation has been extensively studied. A hybrid active filter with damping conductance was proposed to suppress harmonic voltage propagation in distribution power systems Nevertheless; this method did not consider the resonance between the passive filter and the line inductance. The fixed conductance may deteriorate the damping performances. An ant resonance hybrid filter for delta-connected capacitor bank of power-factor-correction applications was presented. This circuit was limited to three single-phase inverters, and the filtering performance was not considered. In addition, the hybrid active filter was proposed for the unified power quality (PQ) conditioner to address PQ issues in the power distribution system. Several case studies of the hybrid active filter considering optimal voltage or current distortion were conducted.

In previous work, the authors have presented a transformer-less hybrid active filter to suppress harmonic resonances in the industrial power system. The hybrid filter is constructed by a seventh-tuned passive filter and an active filter in series connection. It operates as a variable conductance at harmonic frequencies according to the voltage THD, so that harmonic distortion can be reduced to an acceptable level in response to load change and power system variation. Since the series capacitor is responsible for sustaining the fundamental component of the grid voltage, the active filter is able to operate with a very low dc bus voltage, compared with the pure shunt active filter. Hence, both the rated kVA capacity and the switching ripples are reduced accordingly. Moreover, the proposed harmonic conductance is able to avoid over current of the passive filter in the case of mistuning parameters. These features will benefit practical applications.

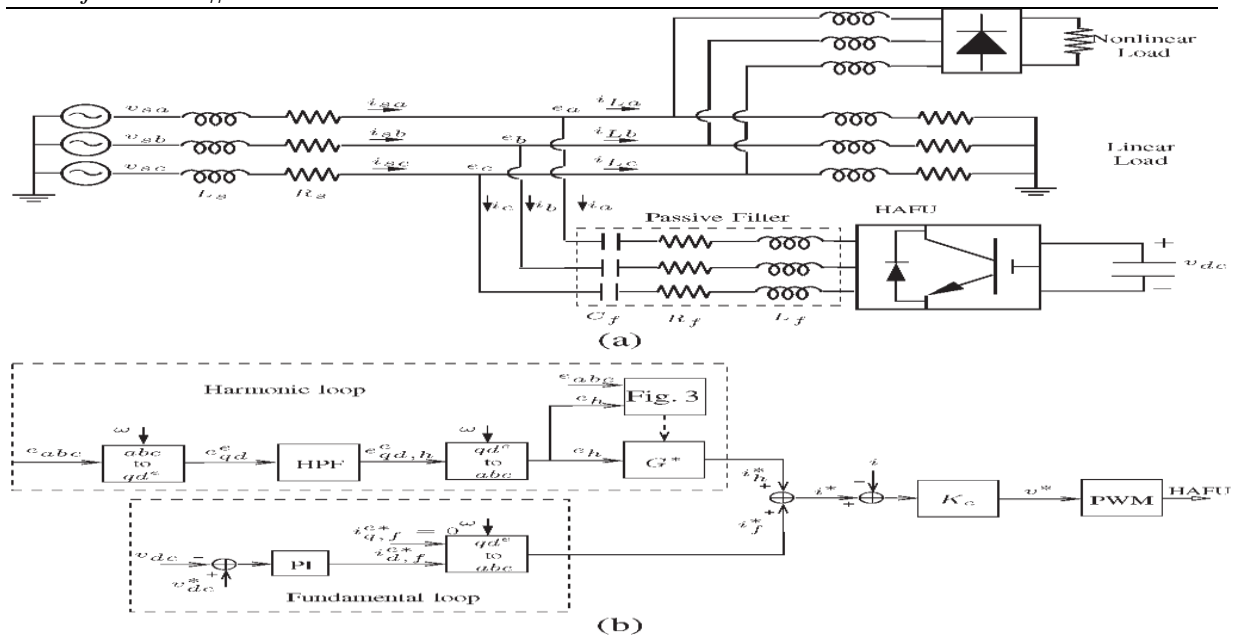


Fig. 1. Proposed HAFU in the industrial power system and its associated control. (a) Circuit diagram of the HAFU. (b) Control block diagram of the HAFU.

In this paper, we further present designing consideration of the hybrid filter. A prototype circuit of the hybrid filter based on 220-V/10-kVA system has been established to verify theoretic analysis, including steady-state behavior, transient response, and stability analysis. The filtering performance of the hybrid filter is discussed considering X/R ratio and magnified variations of line impedance. We also focus on filtering deterioration due to line resistance, voltage unbalance, and capacitive filters in the power system. In many cases, an active power filter is designed to compensate harmonic current produced by a specific nonlinear load, in such a way that it needs to measure the load current to be compensated.

In this paper, the active filter is designed as a harmonic conductance to suppress both harmonic resonance and harmonic distortion by using inverter-side voltage and current measurements. Notice that it does not require current information of the nonlinear loads. Thus, this approach can be suitable in power distribution networks in which the loads may be distributed along a feeder. In addition, compensating fundamental reactive power due to unbalanced load is possible, but it is outside the scope of this paper.

II. OPERATION PRINCIPLE

Fig. 1(a) shows a simplified circuit diagram considered in this paper, where L_s represented the line inductance plus the leakage inductance of the transformer. The hybrid active filter unit (HAFU) is constructed by a seventh-tuned passive filter and a three-phase voltage source inverter in series connection. The passive filter $L_f - C_f$ is intended for compensating harmonic current and reactive power. The inverter is designed to suppress harmonic resonances and improve the filtering performances of the passive filter. Fig. 1(b) shows the overall control block diagram of the HAFU, including harmonic loop, fundamental loop, current regulator, and conductance control. A detailed principle will be presented as follows.

A. Harmonic Loop

To suppress harmonic resonances, the HAFU is proposed to operate as variable conductance at harmonic frequencies as follows:

$$i_h^* = G^* \cdot e_h \quad (1)$$

where i_h^* represents the harmonic current command. The conductance command G^* is a variable gain to provide damping for

all harmonic frequencies. Harmonic voltage component e_h is obtained by using the so-called SRF transformation [9], where a phase-locked loop (PLL) is realized to determine the fundamental frequency of the power system. In the SRF, the fundamental component becomes a dc value, and other harmonic components are still ac values. Therefore harmonic Voltage component of $e_{qd,h}^e$ can be extracted from e_{qd}^e by using high pass filter. After transferring back to three – phase system, the harmonic current command i_h^* is obtained by multiplying

e_h and the conductance command G^* as shown in figure 1.

B. Fundamental Loop

In this paper, the q -axis is aligned to a -phase voltage. Since the passive filter is capacitive at the fundamental frequency, the passive filter draws fundamental leading current from the grid, which is located on the d -axis. The proposed inverter produces slight fundamental voltage on the d -axis, which is in phase with the fundamental leading current. Therefore, the control of dc bus voltage is able to be accomplished by exchanging real power with the grid. Thus, the current command i^{e*} by a proportional–integral (PI) controller. The fundamental current command i_f^* in the three-phase system is generated after applying the inverse SRF transformation.

Equation (2) shows the harmonic voltage drop on the passive filter due to the compensating current of the HAFU [20], where I_h represents the maximum harmonic current of the active filter, and the voltage drop on filter resistance R_f is neglected. As can be seen, a large filter capacitor results in the reduction of the required dc voltage. On the other hand, the filter capacitor determines reactive power compensation of the passive filter at the fundamental frequency. Thus, the dc voltage v_{dc}^* can be

determined based on this compromise. Note that the compensating current should be limited to ensure that the hybrid filter operates without undergoing saturation, i.e.,

$$v_{dc} > 2\sqrt{2} \sum_h \left| \frac{1}{j\omega_h C_f} + j\omega_h L_f \right| \cdot I_h \quad (2)$$

C. Current Regulator

The current command i^* is consisted of i_h^* and i_f^* . Based on the current command i^* and the measured current i , the voltage command v^* can be derived by using a proportional controller as follows:

$$v^* = K_c \cdot (i^* - i) \quad (3)$$

where K_c is a proportional gain. According to the voltage command v^* , space-vector pulse width modulation (PWM) is employed to synthesize the required output voltage of the inverter. Fig. 2 shows the model of the current control. The computational delay of digital signal processing is equal to one sampling delay T , and PWM delay approximates to half sampling delay $T/2$. Hence, the proportional gain K_c can be simply evaluated from both open-loop and closed-loop gains for suitable stability margin and current tracking capability. The frequency-domain analysis of current control will be given in Section

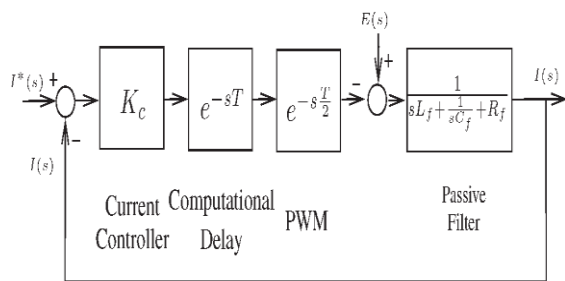


Fig. 2. Closed-loop model of the current control.

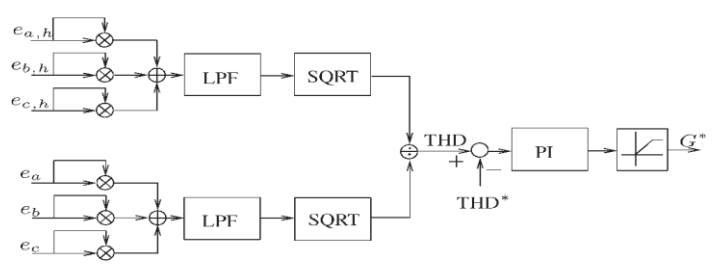


Fig. 3. Conductance control block diagram.

D. Conductance Control

Fig. 3 shows the proposed conductance control. The harmonic conductance command G^* is determined according to the voltage THD at the HAFU installation point. The voltage THD is approximately calculated by the control shown in Fig. 3. Here, two low-pass filters (LPFs) with cutoff frequency $f_{LP} = 20$ Hz are realized to filter out ripple components. The error between the allowable THD* and the measured THD is then fed into a PI controller to obtain the harmonic conductance command G^* . The allowable distortion could be referred to the harmonic limit in IEEE std. Note that PI parameters need to be tuned for required response and stability. For example, the proportional gain can be tuned for transient behavior, and the integral gain is responsible for loop to assure stable operation. This way, the HAFU is able to dynamically adjust G^* to maintain harmonic distortion at an allowable level.

III. ANALYSIS OF FILTERING PERFORMANCE

The filtering performance of the HAFU has been addressed in by developing equivalent circuit models, in which both harmonic impedance and harmonic amplification are considered. The frequency characteristic of the passive filter is changed by the proposed harmonic conductance to avoid unintentional resonances. Here, we will concentrate on the damping performance with variation of line impedance L_s , line resistance R_s , and THD*. Voltage unbalances and filter capacitors in the power system are also considered.

A. L_s on Damping Performances

Voltage THD for various values of L_s . The fifth harmonic voltage is severely amplified at $L_s = 0.3$ mH (2.3%). This resonance is alleviated if L_s is not equal to 2.3%. However, voltage distortion is still significant due to harmonic voltage drop on L_s . After the HAFU is started, the voltage distortion is maintained at 2% by increasing G^* . So the HAFU is operated at ant resonance mode, i.e., $G^* = 0$, if L_s is less than 2.3% for NL₁. This means that the voltage distortion is less than 2%. At that time, a lower THD* command is needed to further reduce the current distortion of i_s .

B. R_s on Damping Performances

In the low-voltage system, the X/R ratio becomes lower, and line resistance on damping performances must be taken into

Consideration. The voltage distortion with varying R_s for NL₂. Since increasing R_s could help in reducing voltage distortion, the required conductance to maintain voltage distortion at 2% is accordingly reduced. From this observation, the HAFU could provide effective damping capability, although R_s is as large as 10%.

C. Determination of THD*

The voltage THD is limited to 5%, and individual distortion should be below 4%. Thus, THD* is set in the range of 3% and 5%. If $v_{s,h}$ and R_s are neglected, voltage THD at E , due to harmonic current load I_h , can be expressed as follows:

$$THD = X_{pu} \sqrt{\sum_h (h \cdot I_{h,pu})^2}$$

X represents the series impedance of both L_s and leakage inductance of transformer. Here, we will consider three cases in Table I to illustrate how to determine voltage THD*, whereonly the fifth and seventh harmonics are considered. In the

TABLE I CALCULATION OF THD*

	$I_{5,pu}$	$I_{7,pu}$	THD
Case 1	0.04	0.03	$0.2X_{pu}$
Case 2	0.035	0.035	$0.22X_{pu}$
Case 3	0.03	0.04	$0.32X_{pu}$

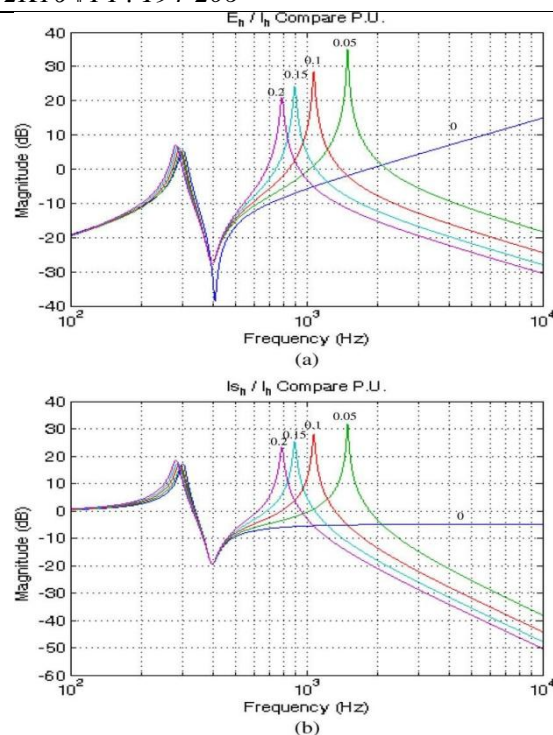


Fig. 4. Harmonic amplification considering different passive filter capacitors C_e (0.05, 0.1, 0.15, and 0.2 p.u.).

(a) Harmonic impedance. (b) Source current amplification

first one, the fifth harmonic is dominant; therefore, THD^* lower than $0.2X_{pu}$ is a sufficient condition to confirm with the harmonic limit. If the fifth and seventh harmonics have the same distortion, $THD^* = 0.22X_{pu}$ is acceptable. When the seventh harmonic becomes critical, $THD^* = 0.32X_{pu}$ works in the third case. Therefore, the first case is the critical one to determine the required THD^* . Note that THD^* should be reduced to enhance filtering capability in the case of low system impedance.

D. Capacitive Filters

In power electronic equipment, LPFs or electromagnetic interference (EMI) filters are usually installed at the grid side of the inverter to alleviate switching ripples into the power system. Since these filters present capacitive characteristics, harmonic resonances may unintentionally occur [32]–[36]. This scenario becomes much more significant in the so-called micro-grid system because a large number of output filters installed

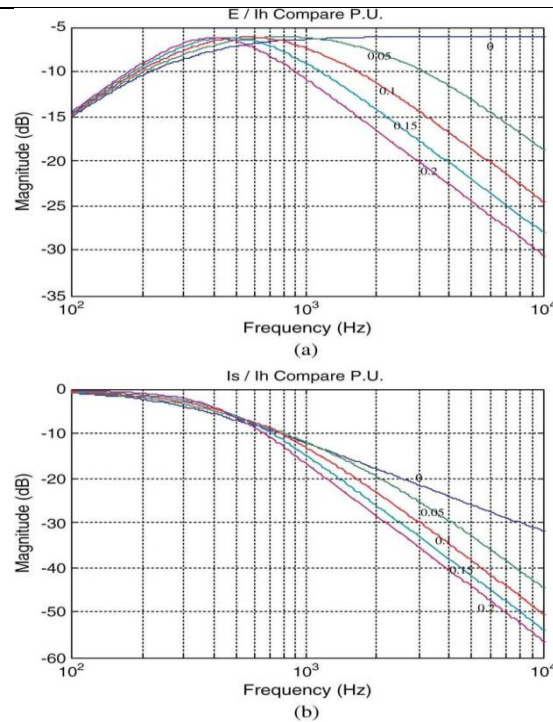


Fig. 5. Damping performances for different passive filter capacitors C_e (0.05, 0.1, 0.15, and 0.2 p.u.) with $G^* = 2.0$ p.u.

(a) Harmonic impedance. (b) Source current amplification.

by the inverter-based distributed generators may participate in resonances. Harmonic impedance and source current amplification for different capacitors C_e installed at the power capacitor chip. As can be seen, C_e shifts the resonant frequency and induce another high-frequency resonance, which may result in serious harmonics. Simulation results in Fig.4 show that amplification of E_h and $i_{s,h}$ can be effectively suppressed by the proposed hybrid filter. Note that the filtering capability is dependent on the bandwidth of the HAFU.

E. Voltage Unbalance

The voltage unbalance in a low-voltage system is usually significant due to high line impedance and uneven distribution of single-phase loads. Large unbalance may cause second-order harmonics in executing SRF control of the HAFU. In this sense, we need to add a band-rejected filter tuned at the second-order harmonic frequency in Fig. 1 to reduce this unwanted component. We also can use second-order-generalized-integrator-based methods to separate negative-sequence component in the proposed control. It is worth nothing that unbalanced voltage or unbalanced current is possible to be compensated by the proposed HAFU. In this case, the HAFU has to generate fundamental negative-sequence voltage. This issue is open for further research.

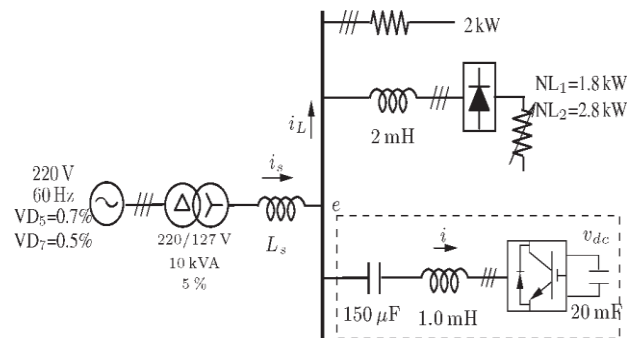


Fig. 6. Experimental setup

TABLE II EXPERIMENTAL PARAMETERS

Power system	220 V(L-L), 60 Hz, $VD_5=0.7\%$, $VD_7=0.5\%$
Transformer	220/127 V, 10 kVA, impedance 5%
Resistive load	2kW(20%)
Nonlinear load	$NL_1=1.8kW(18\%)$, $NL_2=2.8kW(28\%)$
Passive filter	$L_f = 1.0\text{ mH}(7.8\%)$, $C_f = 150\text{ }\mu\text{F}(27\%)$ $Q_f = 20$
Switching frequency	10 kHz
Sampling frequency	20 kHz
Current control	$k_c=5\text{ V/A}$
DC voltage control	$k_p=1\text{ A/V}$, $k_i=100\text{ A/(V}\cdot\text{s)}$, $v_{dc}^*=50\text{ V}$
Tuning control	$k_p=1\text{ A/V}$, $k_i=500\text{ A/(V}\cdot\text{s)}$, $THD^*=2.0\%$ $f_{HP}=10\text{ Hz}$, $f_{LP}=20\text{ Hz}$

TABLE III BASE VALUE

Voltage	220 V
kVA	10 kVA
Impedance	4.84 Ω
Conductance	0.207 Ω^{-1}

IV. SIMULATION VERIFICATION

A power stage setup was built and tested as shown in Fig. 7. Table II gives experimental parameters based on the per unit system in Table III. VD_5 and VD_7 represent the fifth and seventh voltage distortions in the laboratory, respectively. The filter capacitor CF is designed to compensate inductive load, and the filter inductor LF is chosen so that the LC filter is resonant at the seventh-order harmonic frequency. The dc link capacitor is based on the allowed voltage ripple (5%). The control of the hybrid filter was implemented by the evaluation platform of the TMS320F28335 chip to perform the PLL, the synchronous reference frame transformation, LPFs, PI controllers, current regulator, A/D conversion, and PWM units. Note that the OFF state of the HAFU corresponds to turning on three upper switches and turning off three lower switches, which means the three phases of the inverter are short-circuited. At this moment the HAFU works as a pure passive filter.

A. Three-Phase Load

Figs. 7(a) and 8(a) show the grid voltage e , the source current i_s , the filter current i , and the load current i_L for $NL_1 = 1.8\text{ kW}$ and $NL_2 = 2.8\text{ kW}$, respectively. When the HAFU is in the OFF state, the HAFU becomes a passive filter. Since the resonant frequency between the passive filter $L_f - C_f$ and line inductance L_s is close to the fifth harmonic frequency, fifth harmonic distortion on e , i_s , i_f are significantly amplified as

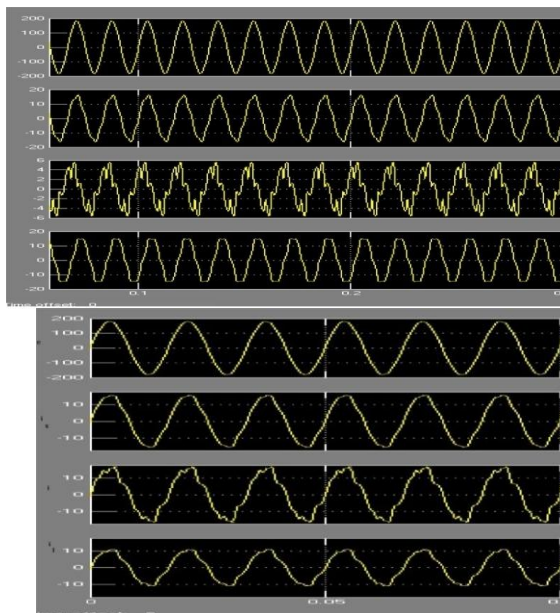


Fig. 7. Line voltage e , source current i_s , load current i_L , and filter current

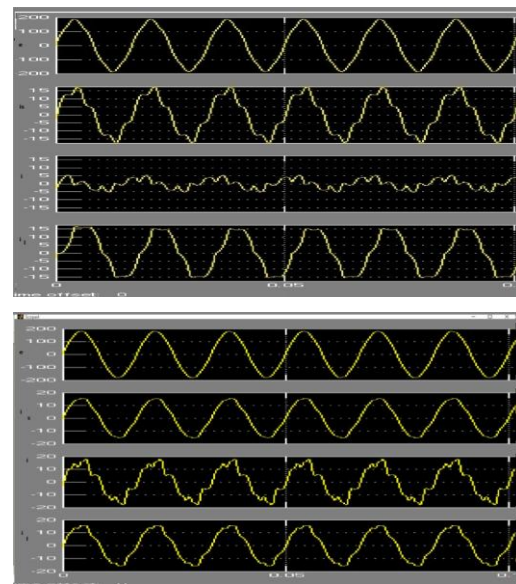


Fig. 8 shows the transient waveforms of G^* , THD

of e , and
 i in the case of NL1 initiated. X-axis: 5 ms/div. (a) HAFU is off. (b) HAFU
 increase from
 is on V_{dc}

as the nonlinear load is changed by a stepped

shown in Figs. 7(a) and 8(a). As can be seen, the passive filter loses its filtering functionality and even causes excessive harmonic current in i_s or harmonic voltage on e . It is worth noting that the resonant frequency could be shifted toward the lower frequency due to the existence of the leakage inductance of the transformer.

Fig. 8. Line voltage e , source current i_s , load current i_L , and filter current i in the case of NL2 initiated. X-axis: 5 ms/div.

(a) HAFU is off. (b) HAFU is on

After the start of the HAFU, the harmonic distortion is clearly improved as shown in Figs. 7(b) and 8(b). The THD of e is reduced to 2.0% with $G^* = 0.97$ p.u. for NL_1 and $G^* = 3.05$ p.u. for NL_2 , respectively. The THD of i_s is also improved below 5% in both cases. Tables IV and V summarize THD data of e , i_s , and i_L measured by a PQ analyzer (HIOKI 3196). High-order harmonics (>13) are not included here due to insignificance. Seventh harmonic voltage distortion is increased after the HAFU is started. This is because the HAFU emulates conductance for all harmonic frequencies. This feature can be used to avoid the overloading of the passive filter at the tuned (seventh) frequency. We also observe that fifth harmonic component of load current i_L is slightly increased. This may result from improvement of the fifth voltage distortion on e .

The detailed results indicate that the proposed HAFU is able to suppress harmonic resonances and to reduce harmonic distortion. More importantly, the HAFU only consumes 470 VA, which is approximately 4.7% of the system rating or 16.7% of NL_2 . Obviously, the required kVA rating of the filter is significantly reduced, in comparison with the use of a pure shunt active power filter.

TABLE IV

HARMONIC DISTORTION FOR $NL_1 = 1.8$ kW. (a) VOLTAGE DISTORTION OF e . (b) CURRENT DISTORTION OF i_s .
 (c) CURRENT DISTORTION OF i_L .
 (d) CURRENT DISTORTION OF i

(a)					
	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	2.9%	2.7%	0.1%	0.5%	0.4%
HAFU ON	2.0%	1.6%	0.9%	0.5%	0.4%

(b)					
	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	8.5%	8.2%	1.7%	0.3%	0.2%
HAFU ON	4.8%	3.7%	2.8%	0.4%	0.4%

(c)					
	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	9.1%	7.3%	4.3%	2.8%	1.6%
HAFU ON	9.1%	7.7%	3.4%	2.5%	1.5%

(d)					
	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	27%	25%	9.2%	3.7%	2.3%
HAFU ON	12%	8.9%	6.7%	3.7%	2.0%

NL_1 to NL_2 at T . Large nonlinear current will result in large voltage distortion on e . Due to the proposed tuning control, the conductance command G^* is increased to 3.05 p.u. to draw more harmonic current shown in Fig. 9(b) in order to maintain voltage THD at 2%. Fig. 9(a) also demonstrates v_{dc} is well controlled to 50 V to ensure proper operation of the active filter

B. Comparison With Current-Compensating Method

Additionally, time-domain simulations have been carried out to compare filtering performances between current compensating and voltage-damping hybrid active filters.

In the current-compensating case, the load current is measured, and harmonic components are extracted by

using synchronous reference frame transformations. In Fig. 9, source current THDs and individual harmonic distortions are given for both light and heavy nonlinear load conditions.

As shown, both methods are able to reduce source current distortion, and their filtering performances are similar. Further, by using the proposed approach, a small voltage THD* value can provide even better filtering results, e.g., $\text{THD}^* < 1.8\%$.

In experimental results of the current-compensating hybrid active filter show that source current distortion can be reduced from 14.2% to 4.3%, which are similar to the results of the proposed voltage-damping hybrid filter given in Table V

TABLE V
HARMONIC DISTORTION FOR NL2=2.8kW. (a) VOLTAGE DISTORTION OF e . (b) CURRENT DISTORTION OF i_s . (c) CURRENT DISTORTION OF i_L . (d) CURRENT DISTORTION OF i

	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	4.6%	4.5%	0.1%	0.6%	0.4%
HAFU ON	2.0%	1.6%	0.8%	0.5%	0.3%

	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	17%	16%	2.1%	0.6%	0.3%
HAFU ON	4.3%	3.3%	2.1%	0.4%	0.4%

	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	13%	10%	6.5%	3.6%	2.2%
HAFU ON	14%	13%	5.5%	3.7%	2.1%

	THD	HD ₅	HD ₇	HD ₁₁	HD ₁₃
HAFU OFF	43%	41%	13%	4.5%	2.7%
HAFU ON	21%	17%	9.2%	5.6%	3.0%

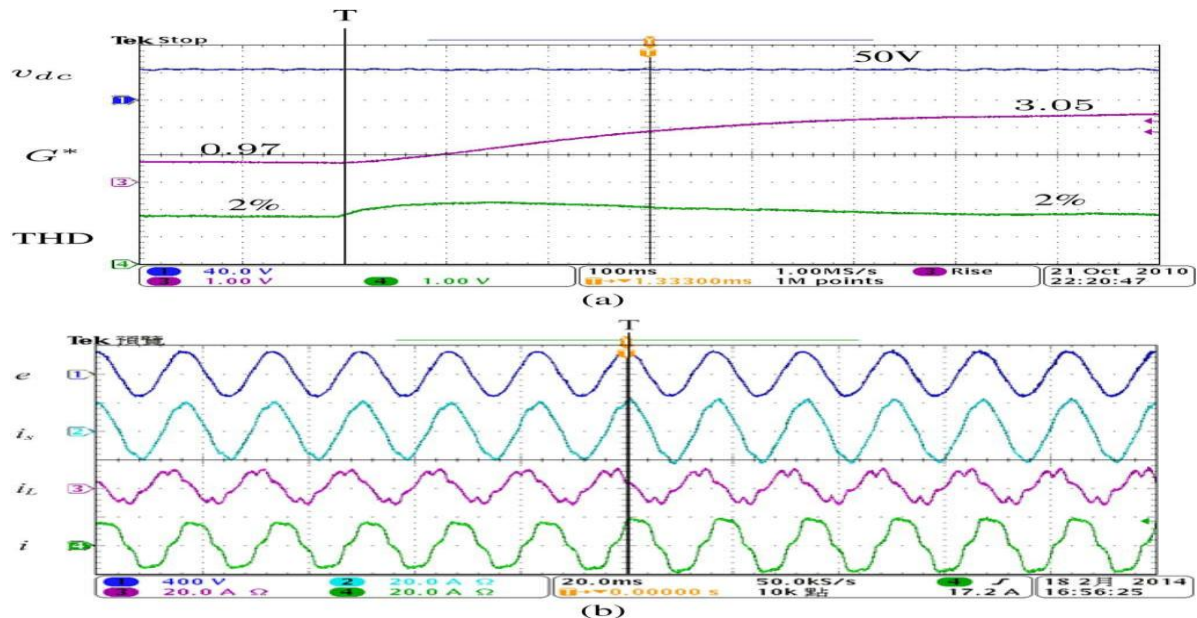


Fig. 9. Transient response when the nonlinear load is increased at T . Waveforms of v_{dc} , Voltage THD, G^* . X-axis: 100 ms/div; Y-axis: v_{dc} (V), G^* (1.21 p.u./div), and THD (1.25%/div). (b) Current waveforms

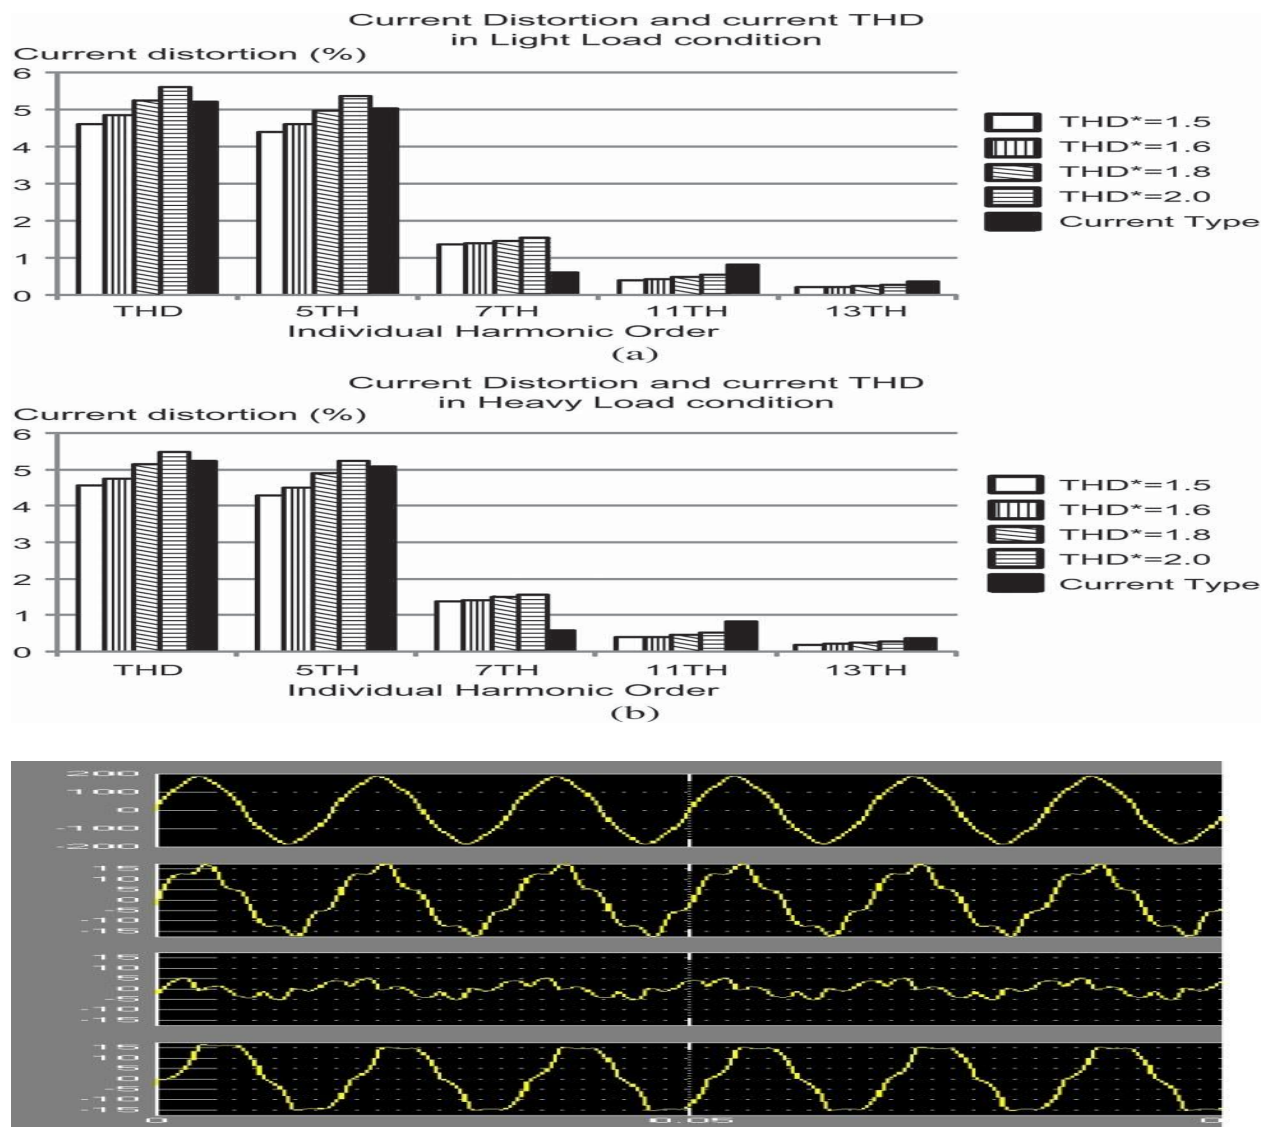


Fig. 10. Comparison of filtering performances between current-compensating and voltage-damping hybrid active filters. (a) Current distortion in light load condition. (b) Current distortion in heavy load condition

C. Single-Phase Load

In addition, filtering experiment considering single-phase nonlinear load is conducted. The setup of three-phase diode rectifier is changed to a single phase one by adding a smooth dc capacitor of 560 μF . Since the nonlinear load is connected between a -phase and b -phase, large third-order harmonic current is generated between them.

As shown in Fig. 11, harmonic current is amplified between the source current i_s and the filter current i . After the HAFU is started, harmonic resonance is suppressed, and current distortion is reduced as indicated in Fig. 12. Test results are summarized in Table VI. Voltage distortion of e is reduced from 4.6% to 3.0% with conductance command $G^* = 0.5$ p.u. Since the passive filter is tuned at the seventh-order harmonic frequency, the proposed hybrid filter is not able to suppress third-order harmonic distortion effectively for single-phase nonlinear load. In this case, the passive filter might be tuned at fifth-order harmonic frequency to improve filtering performance for third-order harmonic.

TABLE VI
 HARMONIC DISTORTION FOR SINGLE-PHASE NONLINEAR LOAD.
 (a) VOLTAGE DISTORTION OF e . (b) CURRENT DISTORTION OF i_s .
 (c) CURRENT DISTORTION OF i_L . (d) CURRENT DISTORTION OF i

	e_{ab}	e_{bc}	e_{ca}
HAFU OFF	6.3%	4.1%	2.4%
HAFU ON	4.1%	2.6%	1.8%

	i_{sa}	i_{sb}	i_{sc}
HAFU OFF	19%	28%	3.8%
HAFU ON	12%	16%	2.5%

	i_{La}	i_{Lb}	i_{Lc}
HAFU OFF	13%	13%	1.2%
HAFU ON	13%	13%	1.2%

	i_a	i_b	i_c
HAFU OFF	22%	25%	6.4%
HAFU ON	11%	12%	4.7%

D. Stability Analysis

The open-loop gain of the current control can be obtained according to Fig. 2. As shown in Fig. 14(a), the resonant

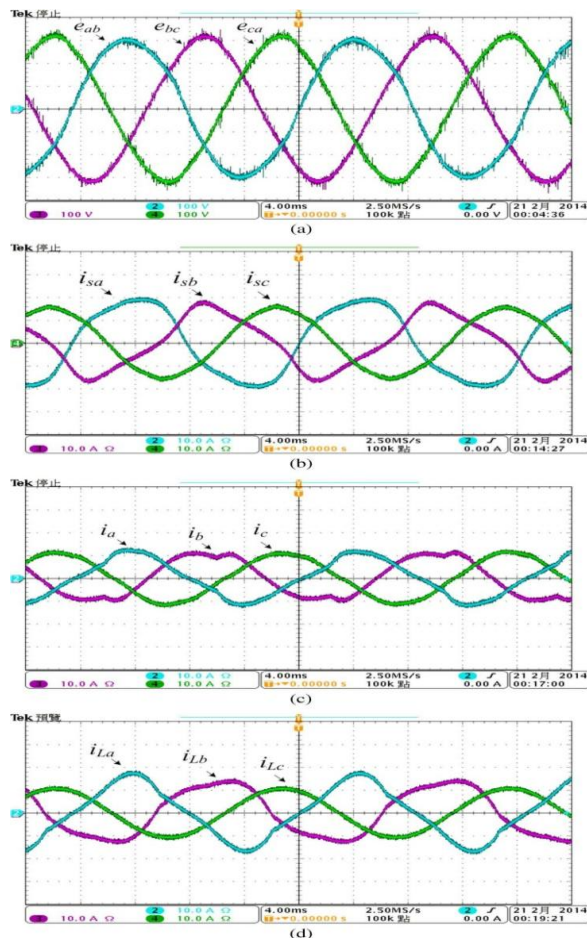


Fig. 11

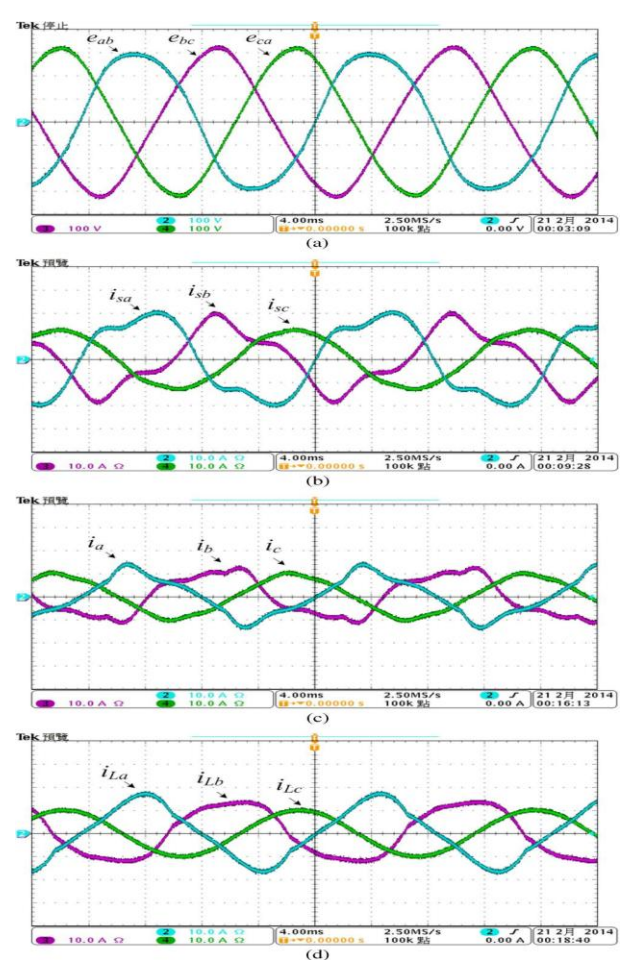


Fig. 12

Fig. 11. HAFU is off for single-phase nonlinear load. (a) Terminal voltage. (b) Source current. (c) Filter current. (d) Load current.

Fig. 12. HAFU is on for single-phase nonlinear load. (a) Terminal voltage. (b) Source current. (c) Filter current. (d) Load current

peak is due to the passive filter. In this paper, the proportional gain K_C is chosen so that the bandwidth is approximately 970 Hz with a phase margin of 83° .

V. CONCLUSION

This paper presents a hybrid active filter to suppress harmonic resonances in industrial power systems. The proposed hybrid filter is composed of a seventh harmonic-tuned passive filter and an active filter in series connection at the secondary side of the distribution transformer. With the active filter part operating as variable harmonic conductance, the filtering performances of the passive filter can be significantly improved. Accordingly, the harmonic resonances can be avoided, and the harmonic distortion can be maintained inside an acceptable level in case of load changes and variations of line impedance of the power system. Experimental results verify the effectiveness of the proposed method. Extended discussions are summarized as follows

- Large line inductance and large nonlinear load may result in severe voltage distortion. The conductance is increased to maintain distortion to an acceptable level.
- Line resistance may help reduce voltage distortion. The conductance is decreased accordingly.
- For low line impedance, THD* should be reduced to enhance filtering performances. In this situation, measuring voltage distortion becomes a challenging issue.
- High-frequency resonances resulting from capacitive filters is possible to be suppressed by the proposed method.
- In case of unbalanced voltage, a band-rejected filter is needed to filter out second-order harmonics if the SRF is realized to extract voltage harmonics.

REFERENCES

- [1]. R. H. Simpson, "Misapplication of power capacitors in distribution systems with nonlinear loads—three case histories," *IEEE Trans. Ind. Appl.*, vol. 41, no. 1, pp. 134–143, Jan./Feb. 2005.
- [2]. T. Dionise and V. Lorch, "Voltage distortion on an electrical distribution system," *IEEE Ind. Appl. Mag.*, vol. 16, no. 2, pp. 48–55, Mar./Apr. 2010.
- [3]. E. J. Currence, J. E. Plizga, and H. N. Nelson, "Harmonic resonance at a medium-sized industrial plant," *IEEE Trans. Ind. Appl.*, vol. 31, no. 4, pp. 682–690, Jul./Aug. 1995.
- [4]. C.-J. Wu *et al.*, "Investigation and mitigation of harmonic amplification problems caused by single-tuned filters," *IEEE Trans. Power Del.*, vol. 13, no. 3, pp. 800–806, Jul. 1998.
- [5]. B. Singh, K. Al-Haddad, and A. Chandra, "A review of active filters for power quality improvement," *IEEE Trans. Ind. Electron.*, vol. 46, no. 5, pp. 960–971, Oct. 1999.
- [6]. H. Akagi, "Active harmonic filters," *Proc. IEEE*, vol. 93, no. 12, pp. 2128–2141, Dec. 2005.
- [7]. A. Bhattacharya, C. Chakraborty, and S. Bhattacharya, "Shunt compensation," *IEEE Ind. Electron. Mag.*, vol. 3, no. 3, pp. 38–49, Sep. 2009.
- [8]. F. Z. Peng, "Application issues of active power filters," *IEEE Ind. Appl. Mag.*, vol. 4, no. 5, pp. 21–30, Sep./Oct. 2001.
- [9]. S. Bhattacharya and D. Divan, "Design and implementation of a hybrid series active filter system," in *Proc. 26th IEEE PESC*, 1995, pp. 189–195.
- [10]. S. Bhattacharya, P.-T. Cheng, and D. Divan, "Hybrid solutions for improving passive filter performance in high power applications," *IEEE Trans. Ind. Appl.*, vol. 33, no. 3, pp. 732–747, May/Jun. 1997.
- [11]. H. Fujita, T. Yamasaki, and H. Akagi, "A hybrid active filter for damping of harmonic resonance in industrial power systems," *IEEE Trans. Power Electron.*, vol. 15, no. 2, pp. 215–222, Mar. 2000.
- [12]. D. Detjen, J. Jacobs, R. W. De Doncker, and H.-G. Mall, "A new hybrid filter to dampen resonances and compensation harmonic currents in industrial power systems with power factor correction equipment," *IEEE Trans. Power Electron.*, vol. 16, no. 6, pp. 821–827, Nov. 2001.
- [13]. V. Verma and B. Singh, "Design and implementation of a current-controlled parallel hybrid power filter," *IEEE Trans. Ind. Appl.*, vol. 45, no. 5, pp. 1910–1917, Sep./Oct. 2009.
- [14]. H. Akagi, S. Srianthumrong, and Y. Tamai, "Comparison in circuit configuration and filtering performance between hybrid and pure shunt active filters," in *Conf. Rec. 38th IEEE IAS Annu. Meeting*, 2003, pp. 1195–1202.
- [15]. C.-S. Lam, W.-H. Choi, M.-C. Wong, and Y.-D. Han, "Adaptive DC-link voltage-controlled hybrid active power filters for reactive power compensation," *IEEE Trans. Power Electron.*, vol. 27, no. 4, pp. 1758–1772, Apr. 2012.